

Kanji

Series of light fittings for interior equipped with POWER LED, metal structure electrostatically painted in sand white, sand coffee, sand black, brushed brass or rose gold.





01-1222

01-1224

01-1220



Kanji

Series of light fittings for interior equipped with POWER LED, metal structure electrostatically painted in sand white, sand coffee, sand black, brushed brass or rose gold.

Serie de corpuri de iluminat pentru interior echipate cu POWER LED, structură din metal vopsit în câmp electrostatic alb mat, maro mat, negru mat, alamă sau aur roz.

Serie di apparecchi per interni, equipaggiati con POWER LED struttura in metallo verniciato a polveri bianco opaco, caffè opaco, nero opaco, ottone oppure oro rosa.

Серия светильников для интерьера, оборудованных POWER светодиодами, структура из металла окрашенного в электростатическом поле в матовый белый, матовый кофе, матовый черный, латунь или розовое золото.

Beltéri világítótételek, POWER LED-el szerelve, elektrosztatikus mezőben matt fehér, matt barna, matt fekete, sárgaréz vagy rózsaszín arany festett fémszerkezet.

Серия интерьерни аплици, оборудвани с POWER LED, метална структура, боядисана в электростатично поле- бял мат, кафе мат, черен мат, месинг или розово злато.

Séria svietidiel pre interiér vybavených POWER LED, kovová konštrukcia je elektrostaticky lakovaná v matnej bielej, matnej kávovej, matnej čiernej farbe, mosadz alebo ružové zlato.


Model finishings



- art. 01-1220 Sand White
- art. 01-1221 Sand Black
- art. 01-2365 Sand Coffee
- art. 01-2360 Rose Gold
- art. 01-2359 Brush Brass

- art. 01-1222 Sand White
- art. 01-1223 Sand Black
- art. 01-2366 Sand Coffee
- art. 01-2362 Rose Gold
- art. 01-2361 Brush Brass

- art. 01-1224 Sand White
- art. 01-1225 Sand Black
- art. 01-2367 Sand Coffee
- art. 01-2364 Rose Gold
- art. 01-2363 Brush Brass



Led type	SMD Bridgelux, 1 pcs x 7W
Power	7W
Input	220V-240V, 50/60Hz
Color temperature	3000K
Lumen source	675 lm
Lumen system	390 lm
Optic	18°
CRI	90
Not dimmable	

CE IP20

Led type	SMD Bridgelux, 1 pcs x 7W
Power	7W
Input	220V-240V, 50/60Hz
Color temperature	3000K
Lumen source	675 lm
Lumen system	390 lm
Optic	18°
CRI	90
Not dimmable	

CE IP20

Led type	SMD Bridgelux, 1 pcs x 7W
Power	7W
Input	220V-240V, 50/60Hz
Color temperature	3000K
Lumen source	675 lm
Lumen system	390 lm
Optic	18°
CRI	90
Not dimmable	



CE IP20

Samples of composition/Exemple de combinații/Esempi di composizione

Multiple pendants must be installed with one of the canopy options listed on pages 709/711.

Variante multiple de suspensii pot fi asamblate cu ajutorul bazelor optionale prezentate la paginile 709/711.

Sospensioni multiple possono essere installate sui rosoni presenti alle pagine 709/711.

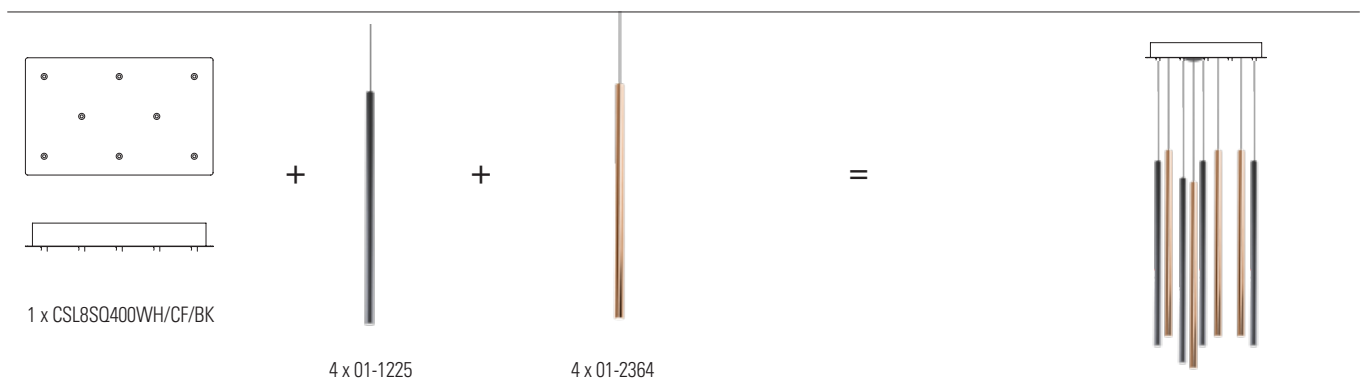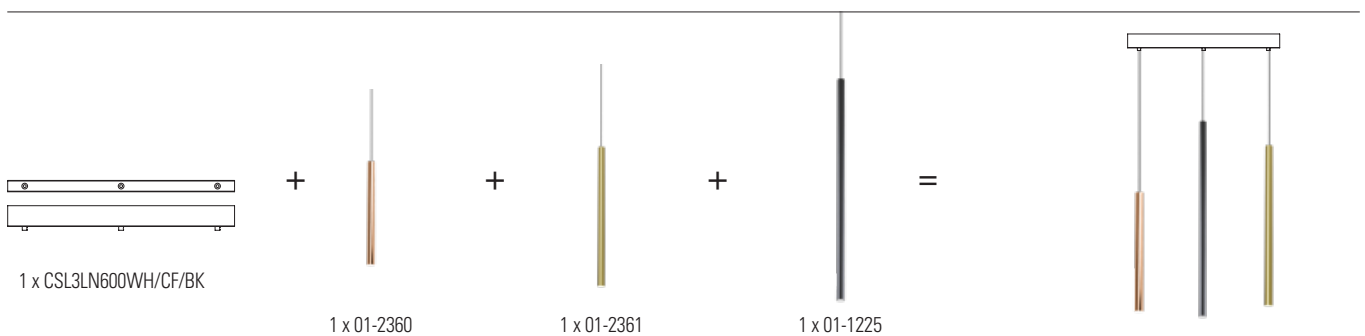




CSL14SQ700WH+ 4 x 01-2363
+ 4 x 01-1222 + 2 x 01-1223
+ 2 x 01-1224 + 2 x 01-1225



CSL15RD550BK + 15x01-1223

Trimless canopy


- art. **CT1 MWH Sand White**
- art. **CT1 MBK Sand Black**

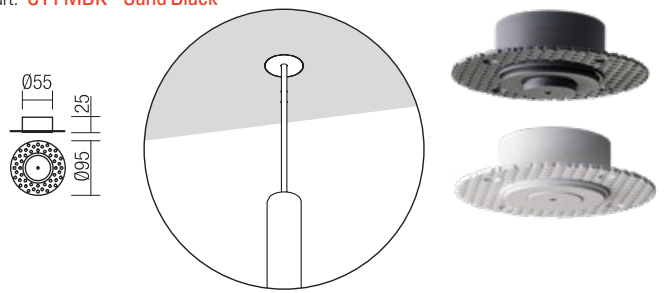

Metal accessories painted in sand white or sand black for installing the suspensions in trimless version.
Maximum diameter of cable access hole 4,5 mm.

Accesorii din metal vopsit alb mat sau negru mat, pentru montajul trimless al suspensiilor.
Diametrul maxim al găurii de ieșire a cablului 4,5 mm.

Accessori in metallo verniciato bianco opaco o nero opaco per montaggio delle sospensioni a filo muro (trimless).
Diametro massimo del foro di uscita del cavo elettrico 4,5 mm.

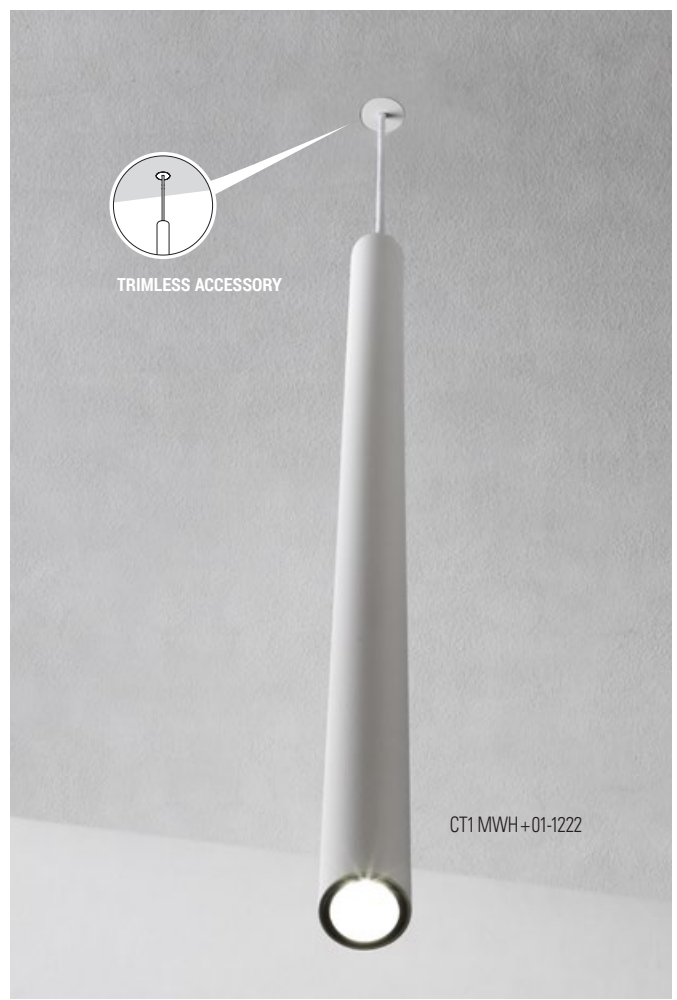



01-1216



01-1217





01-1219



art. 01-1216 Sand White
art. 01-1217 Sand Black



art. 01-1218 Sand White
art. 01-1219 Sand Black



Led type	SMD Bridgelux, 1 pcs x 7W
Power	7W
Input	220V-240V, 50/60Hz
Color temperature	3000K
Lumen source	675 lm
Lumen system	390 lm
Optic	18°
CRI	90
Not dimmable	

CE IP20

Led type	SMD Bridgelux, 1 pcs x 7W
Power	7W
Input	220V-240V, 50/60Hz
Color temperature	3000K
Lumen source	675 lm
Lumen system	390 lm
Optic	18°
CRI	90
Not dimmable	

CE IP20